

# Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/US05/002807

International filing date: 31 January 2005 (31.01.2005)

Document type: Certified copy of priority document

Document details: Country/Office: US  
Number: 10/767,797  
Filing date: 29 January 2004 (29.01.2004)

Date of receipt at the International Bureau: 03 March 2005 (03.03.2005)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland  
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse

1288009

# THE UNITED STATES OF AMERICA

TO ALL TO WHOM THESE PRESENTS SHALL COME:

UNITED STATES DEPARTMENT OF COMMERCE

United States Patent and Trademark Office

*February 22, 2005*

**THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A FILING DATE.**

**APPLICATION NUMBER: 10/767,797**

**FILING DATE: January 29, 2004**

**RELATED PCT APPLICATION NUMBER: PCT/US05/02807**



Certified by

Under Secretary of Commerce  
for Intellectual Property  
and Director of the United States  
Patent and Trademark Office



14023 U.S. PTO

012904

PTO/SB/05 (01-04)

Approved for use through 07/31/2006. OMB 0651-0032  
U.S. Patent and Trademark Office. U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

UTILITY  
PATENT APPLICATION  
TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No.	10303-62177
First Inventor	Comeaux, Vernal J.
Title	Thermal Reservoir for Two-Pipe Hydronic Air-Conditioning System
Express Mail Label No.	EU899595123US

## APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

## ADDRESS TO:

Mail Stop Patent Application  
Commissioner for Patents  
P.O. Box 1450  
Alexandria VA 22313-1450

1. ☒ Fee Transmittal Form (e.g., PTO/SB/17)  
(Submit an original and a duplicate for fee processing)
2. ☒ Applicant claims small entity status.  
See 37 CFR 1.27.
3. ☒ Specification [Total Pages 23]  
(preferred arrangement set forth below)
  - Descriptive title of the invention
  - Cross Reference to Related Applications
  - Statement Regarding Fed sponsored R & D
  - Reference to sequence listing, a table, or a computer program listing appendix
  - Background of the Invention
  - Brief Summary of the Invention
  - Brief Description of the Drawings (if filed)
  - Detailed Description
  - Claim(s)
  - Abstract of the Disclosure
4. ☒ Drawing(s) (35 U.S.C. 113) [Total Sheets 8]
5. Oath or Declaration [Total Sheets 2]
  - a. ☒ Newly executed (original or copy)
  - b. ☐ Copy from a prior application (37 CFR 1.63(d))  
(for continuation/divisional with Box 18 completed)
  - i. ☐ DELETION OF INVENTOR(S)  
Signed statement attached deleting inventor(s) name in the prior application, see 37 CFR 1.63(d)(2) and 1.33(b).
6. ☐ Application Data Sheet. See 37 CFR 1.76

7. ☐ CD-ROM or CD-R in duplicate, large table or Computer Program (Appendix)
8. Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)
  - a. ☐ Computer Readable Form (CRF)
  - b. Specification Sequence Listing on:
    - i. ☐ CD-ROM or CD-R (2 copies); or
    - ii. ☐ Paper
  - c. ☐ Statements verifying identity of above copies

## ACCOMPANYING APPLICATION PARTS

9. ☐ Assignment Papers (cover sheet & document(s))
10. ☐ 37 CFR 3.73(b) Statement ☒ Power of Attorney (2)  
(when there is an assignee)
11. ☐ English Translation Document (if applicable)
12. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations
13. ☐ Preliminary Amendment
14. ☒ Return Receipt Postcard (MPEP 503)  
(Should be specifically itemized)
15. ☐ Certified Copy of Priority Document(s)  
(if foreign priority is claimed)
16. ☒ Nonpublication Request under 35 U.S.C. 122  
(b)(2)(B)(i). Applicant must attach form PTO/SB/35 or its equivalent. (2)
17. ☒ Other: Petition to Make Special

18. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in the first sentence of the specification following the title, or in an Application Data Sheet under 37 CFR 1.76:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No. ....

Prior application information:

Examiner .....

Art Unit: .....

For CONTINUATION OR DIVISIONAL APPS only; The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 5b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

## 19. CORRESPONDENCE ADDRESS

☒ Customer Number: 29148 OR ☐ Correspondence address below

Name

Address

City

State

Zip Code

Country

Telephone

Fax

Name (Print/Type)

Joseph L. Lemoine, Jr.

Registration No. (Attorney/Agent)

32,256

Signature

Date

01/29/04

This collection of information is required by 37 CFR 1.53(b). The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 12 minutes to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Mail Stop Patent Application, Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.

1497 U.S. PTO

10767797



012904

14028 U.S. PTO

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

**FEE TRANSMITTAL  
for FY 2004**

Effective 10/01/2003. Patent fees are subject to annual revision.

☒ Applicant claims small entity status. See 37 CFR 1.27**TOTAL AMOUNT OF PAYMENT** (\$ ) 385.00**Complete if Known**

Application Number	TBA
Filing Date	January 29, 2004
First Named Inventor	Comeaux, Vernal J.
Examiner Name	TBA
Art Unit	TBA
Attorney Docket No.	10303-62177

**METHOD OF PAYMENT (check all that apply)**☒ Check ☐ Credit card ☐ Money Order ☐ Other ☐ None☒ Deposit Account:Deposit  
Account  
Number  
Deposit  
Account  
Name

15-0607

The Onebane Law Firm

The Director is authorized to: (check all that apply)

☐ Charge fee(s) indicated below ☐ Credit any overpayments☒ Charge any additional fee(s) or any underpayment of fee(s)☐ Charge fee(s) indicated below, except for the filing fee to the above-identified deposit account.**FEE CALCULATION****1. BASIC FILING FEE**

Large Entity Fee Code (\$)	Small Entity Fee Code (\$)	Fee Description	Fee Paid
1001 770	2001 385	Utility filing fee	385
1002 340	2002 170	Design filing fee	
1003 530	2003 265	Plant filing fee	
1004 770	2004 385	Reissue filing fee	
1005 160	2005 80	Provisional filing fee	
<b>SUBTOTAL (1)</b>			<b>(\$ ) 385.00</b>

**2. EXTRA CLAIM FEES FOR UTILITY AND REISSUE**

Total Claims	Extra Claims	Fee from below	Fee Paid
15	-20** = 0	0	0
1	-3** = 0	0	0
Multiple Dependent		0	0

Large Entity Fee Code (\$)	Small Entity Fee Code (\$)	Fee Description
1202 18	2202 9	Claims in excess of 20
1201 86	2201 43	Independent claims in excess of 3
1203 290	2203 145	Multiple dependent claim, if not paid
1204 86	2204 43	** Reissue independent claims over original patent
1205 18	2205 9	** Reissue claims in excess of 20 and over original patent
<b>SUBTOTAL (2)</b>		

\*\*or number previously paid, if greater; For Reissues, see above

**FEE CALCULATION (continued)****3. ADDITIONAL FEES**

Large Entity Small Entity

Fee Code (\$)	Fee Code (\$)	Fee Description	Fee Paid
1051 130	2051 65	Surcharge - late filing fee or oath	
1052 50	2052 25	Surcharge - late provisional filing fee or cover sheet	
1053 130	1053 130	Non-English specification	
1812 2,520	1812 2,520	For filing a request for <i>ex parte</i> reexamination	
1804 920*	1804 920*	Requesting publication of SIR prior to Examiner action	
1805 1,840*	1805 1,840*	Requesting publication of SIR after Examiner action	
1251 110	2251 55	Extension for reply within first month	
1252 420	2252 210	Extension for reply within second month	
1253 950	2253 475	Extension for reply within third month	
1254 1,480	2254 740	Extension for reply within fourth month	
1255 2,010	2255 1,005	Extension for reply within fifth month	
1401 330	2401 165	Notice of Appeal	
1402 330	2402 165	Filing a brief in support of an appeal	
1403 290	2403 145	Request for oral hearing	
1451 1,510	1451 1,510	Petition to institute a public use proceeding	
1452 110	2452 55	Petition to revive - unavoidable	
1453 1,330	2453 665	Petition to revive - unintentional	
1501 1,330	2501 665	Utility issue fee (or reissue)	
1502 480	2502 240	Design issue fee	
1503 640	2503 320	Plant issue fee	
1460 130	1460 130	Petitions to the Commissioner	
1807 50	1807 50	Processing fee under 37 CFR 1.17(q)	
1806 180	1806 180	Submission of Information Disclosure Stmt	
8021 40	8021 40	Recording each patent assignment per property (times number of properties)	
1809 770	2809 385	Filing a submission after final rejection (37 CFR 1.129(a))	
1810 770	2810 385	For each additional invention to be examined (37 CFR 1.129(b))	
1801 770	2801 385	Request for Continued Examination (RCE)	
1802 900	1802 900	Request for expedited examination of a design application	

Other fee (specify) Non Fee Petition to Make

\*Reduced by Basic Filing Fee Paid

**SUBTOTAL (3)** (\$ )**SUBMITTED BY**

(Complete (if applicable))

Name (Print/Type)	Joseph L. Lemoine, Jr.	Registration No.	32,256	Telephone	337-237-2660
Signature	<i>Joseph L. Lemoine, Jr.</i>	(Attorney/Agent)		Date	01/29/04

**WARNING:** Information on this form may become public. Credit card information should not be included on this form. Provide credit card information and authorization on PTO-2038.

This collection of information is required by 37 CFR 1.17 and 1.27. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 12 minutes to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS.

SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

**NONPUBLICATION REQUEST  
UNDER  
35 U.S.C. 122(b)(2)(B)(i)**

First Named Inventor	Comeaux, Vernal J.
Title	Thermal Reservoir for Two-Pipe Hydronic Air-Conditioning System
Attorney Docket Number	10303-62177

I hereby certify that the invention disclosed in the attached application **has not and will not be** the subject of an application filed in another country, or under a multilateral agreement, that requires publication at eighteen months after filing.

I hereby request that the attached application not be published under 35 U.S.C. 122(b).

01/29/04

Date



Signature

337-236-6931

Telephone number

Vernal J. Comeaux

Typed or printed name

This request must be signed in compliance with 37 CFR 1.33(b) and submitted with the application **upon filing**.

Applicant may rescind this nonpublication request at any time. If applicant rescinds a request that an application not be published under 35 U.S.C. 122(b), the application will be scheduled for publication at eighteen months from the earliest claimed filing date for which a benefit is claimed.

If applicant subsequently files an application directed to the invention disclosed in the attached application in another country, or under a multilateral international agreement, that requires publication of applications eighteen months after filing, the applicant **must** notify the United States Patent and Trademark Office of such filing within forty-five (45) days after the date of the filing of such foreign or international application. **Failure to do so will result in abandonment of this application (35 U.S.C. 122(b)(2)(B)(iii)).**

This collection of information is required by 37 CFR 1.213(a). The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 6 minutes to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

If you need assistance in completing the form, call 1-800-PTO-9199 (1-800-786-9199) and select option 2.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

<b>NONPUBLICATION REQUEST UNDER 35 U.S.C. 122(b)(2)(B)(i)</b>		First Named Inventor	Comeaux, Vernal J.
		Title	Thermal Reservoir for Two-Pipe Hydronic Air-Conditioning System
		Attorney Docket Number	10303-62177

I hereby certify that the invention disclosed in the attached application **has not and will not be** the subject of an application filed in another country, or under a multilateral agreement, that requires publication at eighteen months after filing.

I hereby request that the attached application not be published under 35 U.S.C. 122(b).

1/29/04  
Date

Chris D Morgan  
Signature

337-886-1280  
Telephone number

Chris D. Morgan  
Typed or printed name

This request must be signed in compliance with 37 CFR 1.33(b) and submitted with the application **upon filing**.

Applicant may rescind this nonpublication request at any time. If applicant rescinds a request that an application not be published under 35 U.S.C. 122(b), the application will be scheduled for publication at eighteen months from the earliest claimed filing date for which a benefit is claimed.

If applicant subsequently files an application directed to the invention disclosed in the attached application in another country, or under a multilateral international agreement, that requires publication of applications eighteen months after filing, the applicant **must** notify the United States Patent and Trademark Office of such filing within forty-five (45) days after the date of the filing of such foreign or international application. **Failure to do so will result in abandonment of this application (35 U.S.C. 122(b)(2)(B)(iii)).**

This collection of information is required by 37 CFR 1.213(a). The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 6 minutes to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

If you need assistance in completing the form, call 1-800-PTO-9199 (1-800-786-9199) and select option 2.

PATENT APPLICATION  
of  
VERNAL J. COMEAUX AND CHRIS D. MORGAN  
for  
THERMAL RESERVOIR FOR TWO-PIPE  
HYDRONIC AIR-CONDITIONING SYSTEM

**BACKGROUND - FIELD OF THE INVENTION**

In the art of heating, cooling and otherwise "conditioning" the air of buildings, "two-  
pipe" hydronic systems are known. In such systems either hot or cold water, typically  
from a central location, is circulated about a piping loop. Fluidly attached to said loop,  
and disposed in zones of the building the air of which is to be conditioned, are a plurality  
of water-to-air heat exchangers. By regulating the amount of water and/or air which is  
passed through a particular water-to-air heat exchanger the air of the associated zone  
may be warmed or alternatively cooled a desired amount. The invention disclosed and  
claimed herein relates to a thermal reservoir means whereby water stored in said thermal  
reservoir at one temperature (for instance cold) may be used to reversibly displace water  
circulating about the piping/heat exchangers at a different temperature (for instance hot)  
circulating about said piping/heat exchangers, thereby permitting rapid switching of a  
two-pipe hydronic air-conditioning system between heating and cooling modes while  
conserving the energy content of both the stored and circulating water.

**BACKGROUND - DESCRIPTION OF RELATED ART**

In the art of heating or cooling the air of buildings, hydronic systems are well  
known. In such systems, means, typically from a central location disposed in or near the  
building, is provided with means, typically called a "boiler," to heat water and means,  
typically called a "chiller," to cool water. In such system the "hot" or "chilled" water is  
circulated about one or more loops of piping containing water-to-air heat exchangers

(commonly called "coils") which are disposed in "zones" the air of which is to be heated or cooled. By regulating (typically by thermostatic means) the amount of hot or chilled water which is permitted to pass through the interior of the water-to-air heat exchanger of a particular zone, and/or by regulating the amount of air forced over the exterior of said water-to-air heat exchanger, the temperature of the air of a particular zone can be selected.

Hydronic air-conditioning systems are typically classified into two general types, namely "four-pipe" and "two-pipe" systems. The essential difference between these systems is that four-pipe systems are comprised of two separate piping loops, one of which carries heated water and the other of which carries chilled water. Whereas a two-pipe system (sometimes called a one-pipe system) is comprised of only one loop of water piping. Said system has a supply line and a return line, thus is most often referred to as a "two-pipe" system. Accordingly, while hot and cold water are typically always available for immediate use in a four-pipe hydronic air-conditioning system, in a two-pipe hydronic air-conditioning system either hot or cold water is available for use at any particular time.

A four-pipe system has certain advantages. Since both hot and chilled water may be circulated simultaneously in such system, the air of some zones of the building may be heated while others are being cooled. In addition thereto, switching a zone between heating and cooling can be accomplished rapidly, by simply changing the water-to-air heat exchanger of that zone to using water circulating in the opposite piping loop. However, a four-pipe hydronic air-conditioning system, which in essence may be considered substantially "dual" two-pipe systems, has various disadvantages, including but not limited to greater initial cost and additional operating and maintenance expenses.

On the other hand, a two-pipe system has certain advantages. Namely it requires only about half the piping of a four-pipe system, the water-to-air heat exchangers and



valves are of simpler construction and normally either the boiler or chiller is operated (not both), thereby reducing op rating costs. However a two-pipe system has certain disadvantages, two of which are a significant time delay and energy waste which occurs when a two-pipe hydronic air-conditioning system is switched from heating to cooling mode (or the reverse). For instance, when such a system is in the heating mode, water in the range of 180 Degrees Fahrenheit is circulating in the piping and water-to-air heat exchangers of the system. When switching such system to the cooling mode, that water must be brought to a temperature of approximately 40 Degrees Fahrenheit for efficient air cooling to take place. That change of water temperature (by circulation through the system chiller) not only takes a significant length of time to accomplish, but in said process the energy invested in heating the water to about 180 Degrees Fahrenheit is lost, and running of the chiller for said purpose consumes significant amounts of energy to make such temperature reduction. When switching a two-pipe hydronic air-conditioning system from cooling to heating, a reverse temperature transition must occur producing similar time delay and energy waste. Moreover, during the significant time when temperature of the water is in transition, the temperature of the air in the building cannot be heated or cooled as desired. Both this waste of energy and time delay are, of course, highly undesirable.

While switching a two-pipe hydronic air-conditioning system from heating to cooling (or the reverse) might be more rapidly accomplished if an "over-sized" boiler and chiller were used, that solution has disadvantages, including but not necessarily limited to, additional space such equipment may consume, greater cost and maintenance of larger system components and higher peak demand such larger equipment will typically impose on the utility system which power them (which in some cases will result in a higher overall utility rate structure being imposed on the owner/tenant of the building). Moreover use

of over-sized equipment does not solve the energy loss inherent in switching a two-pipe hydronic air-conditioning system from heating to cooling (or the reverse).

A two-pipe hydronic air-conditioning system will usually contain between several hundred to a few thousands of gallons of water in circulation. There is substantial investment of energy resources in heating that water to approximately 180 degrees Fahrenheit. Not only is that investment of energy "lost" when hot water in the system is then cooled, cooling it requires consumption of additional energy resources. It will be recognized that the same problem is presented when switching a two-pipe hydronic system from cooling to heating. It will be recognized that the aforementioned disadvantages can become acute during seasonal climatic changes, where switching from heating to cooling modes (and the reverse) may sometimes be required on a daily, or even more frequent basis. For instance, during climatic changes it may well be possible for heating to be required at night but cooling during the day. Therefore, for instance, during the day, it may take such a long time to switch from heating to cooling (sometimes several hours), that by the time efficient cooling conditions take place, during which air temperature in the building may not be able to be cooled as desired, it is almost time to switch the system back to night-time heating mode. In this switching back and forth between heating and cooling modes, substantial quantities of energy can be wasted, and air-temperature in the building neither heated or cooled as desired throughout large parts of a 24-hour period of time.

The invention disclosed and claimed herein is directed to resolving the aforementioned disadvantages of a two-pipe hydronic air-conditioning system. By providing the thermal reservoir and associated valving, hot water circulating in the piping and water-to-air heat exchangers of a two-pipe hydronic air-conditioning system may be speedily recovered into insulated thermal reservoir and replaced with cold water from

said reservoir (and the reverse), thereby enabling rapid switching of a two-pipe hydronic air-conditioning system between heating and cooling modes (and the reverse) without unnecessary waste of energy and avoiding the problems posed by oversized heating and cooling means.

## **OBJECTS OF THE INVENTION**

The general object of the invention disclosed and claimed herein is to provide an improved two-pipe hydronic air-conditioning system, namely to provide one which may be rapidly switched between heating and cooling modes (and the reverse) without unnecessary waste of energy resources. The invention is intended to reduce both the time and energy waste associated with switching said systems between heating and cooling modes (and the reverse). In addition thereto, an object of the invention herein disclosed and claimed is to provide a means for rapidly switching a two-pipe hydronic air-conditioning system from heating to cooling, and the reverse, without the necessity of over-sizing the heating and cooling means of said system. Yet another object of the invention is to be able to affect rapid switching of a two-pipe hydronic air-conditioning system without increasing peak demand for energy utilized by said system.

More directed to the means by which the above general objects are accomplished by the invention disclosed and claimed, a general object of the invention is to provide a thermal reservoir and associated valves for a two-pipe hydronic air-conditioning system whereby water in the piping and water-to-air heat exchangers of the system (at one temperature) may be exchanged with water stored in the thermal reservoir (at a different temperature) and the water recovered from the piping and water-to-air heat exchangers of the system directed into the thermal reservoir for subsequent reuse thereof. Namely the object of the invention is to provide a means whereby when switching the system from heating to cooling mode, hot water (typically in the range of 180 Degrees Fahrenheit) may

be facilely displaced from the piping and water-to-air heat exchangers of the system into a thermally effici nt storage tank and replaced by pre-stored chilled water (typically in the range of 40 Degrees Fahrenheit) from the thermal reservoir. A further object of the invention is also to provide a fully reversible system, which operates in substantially  
5 reverse fashion when switching from cooling to heating as is does when switching from heating to cooling. Yet a further object of the invention is to provide a thermal reservoir and valving means which is facile to use, thermally efficient, does not consume excessive space, is inexpensive, durable and may be easily retro-fitted into existing two-pipe hydronic air-conditioning systems or included therein during original installation thereof.  
10 Means may be provided to automatically operate the valves of the invention in appropriate sequence. Means may be optionally provided for maintaining the water of the thermal reservoir at a desired temperature.

#### SUMMARY OF THE INVENTION

The above and further objects are achieved in accordance with the present  
15 invention wherein there is provided a two-pipe hydronic air-conditioning system having a thermal reservoir, whereby water stored therein, at one temperature, may facilely be exchanged with water, at a different temperature, circulating in the system and water recovered from circulation stored for subsequent reuse. Well insulated storage tank means is used to form a thermal reservoir. Valve means are used to simultaneously cause  
20 water from the piping and water-to-air heat exchangers of a two-pipe hydronic air-conditioning system to be directed into a thermal reservoir as water from the thermal reservoir is directed therefrom and into said piping and water-to-air heat exchangers, without substantial mixing of hot and cold water.

When the two-pipe hydronic air-conditioning system is operating in the heating  
25 mode, hot wat r (typically in the range of about 180 Degrees Fahrenheit) is circulating

within the piping and water-to-air heat exchangers of the system, and, the thermal reservoir of the invention will contain substantially cooler water (preferably at the temperature which is optimum when the system is operating in the cooling mode, about 40 Degrees Fahrenheit). When switching the two-pipe hydronic air-conditioning system from heating to cooling, valving is used to direct hot water, which is in the piping and water-to-air heat exchangers of the system, into a well insulated tank means, and cold water in an insulated tank means is simultaneously directed into the piping and water-to-air heat exchangers of the system. When the hot water has been fully displaced from the system and into an insulated water tank, valving may be used to isolate hot water in the well insulated tank means from the remainder of the system, thereby conserving the energy content thereof for subsequent use at a later time. When switching the system from cooling to heating a substantially reverse process is employed, namely cold water circulating in the system (the piping and water-to-air heat exchangers thereof) is directed into a thermal reservoir (well insulated tank means) and hot water from a thermal reservoir is directed into circulation.

In the preferred embodiment of the invention, a water tank, divided by a movably disposed piston may be used to store hot and/or cold water without mixing thereof. In other embodiments of the invention separate tanks may be provide to store hot or cold water.

## BRIEF DESCRIPTION OF THE DRAWINGS

The invention will be better understood by reference to the accompanying drawings wherein:

FIG. 1 is a schematic representation of a two-pipe hydronic air-conditioning system of prior art.

FIG. 2 is a schematic representation of the preferred embodiment of the thermal

reservoir of the invention in a preferred location (parallel with boiler and chiller of the two-pipe hydronic air-conditioning system).

FIG. 3 is a schematic representation of the preferred embodiment of the thermal reservoir of FIG. 2 of the invention when the two-pipe hydronic air-conditioning system is in the heating mode (cold water is contained in said thermal reservoir).

FIG. 4 is a schematic representation of the preferred embodiment of the thermal reservoir of FIG. 2 of the invention when the two-pipe hydronic air-conditioning system is in the cooling mode (hot water is contained in said thermal reservoir).

FIG. 5 is a schematic representation of the thermal reservoir of the invention as disposed in the supply line of the two-pipe hydronic air-conditioning system.

FIG. 6 is a schematic representation of an alternative embodiment of the thermal reservoir of the invention having a plurality of pistons containing tanks.

FIG. 7 is a schematic representation of another alternative embodiment of the invention employing use of separate tanks for hot and cold water storage.

FIG. 8 is a schematic representation of another alternative embodiment of the invention employing use of a flexible bladder in the tanks containing gas pressure.

#### DESCRIPTION OF THE PREFERRED EMBODIMENT OF THE INVENTION

While the present invention will be described with reference to preferred embodiments, it will be understood by those who are skilled in the art that various changes may be made and equivalents may be substituted for elements thereof without departing from the scope of the invention. In addition, many modifications may be made to adapt a particular situation or material to the teachings of the invention without departing from the essential scope thereof. It is therefore intended that the present invention not be limited to the particular embodiments disclosed as the best mode contemplated for carrying out this invention, but that the invention will include all

embodiments and legal equivalents thereof which are within the scope of the appended claims.

“Two-pipe” hydronic air-conditioning systems, such as schematically represented in FIG. 1 are known. Such systems are generally used in buildings having multiple zones where individual control of the amount of heating, or alternatively cooling, of the air of each zone is desired. Depending on the size of the rooms in a building, a zone may comprise part or all of a room or several rooms. In such systems either “hot” (generally in the range of about 180 Degrees Fahrenheit) water, or alternatively “cold” water (generally in the range of about 40 Degrees Fahrenheit) is generated in a “utilities” room 1 which is typically located in, adjacent or near the building, the air of which is to be “conditioned” (either heated or cooled, to a desired range, usually in a range of about 65 to 75 Degrees Fahrenheit). Those skilled in the art will know various means for producing hot water. In common parlance such heating means 2 are often referred to as the “boiler” (even though they do not usually heat water to boiling point). Likewise those skilled in the art will know various means for producing cold water. In common parlance said cooling means 3 are often referred to as the “chiller.”

Characteristic of a two-pipe hydronic air-conditioning system is that either hot or cold water, but not simultaneously both, can be circulated from said utilities room 1 (from either the boiler 2 or chiller 3) about a loop of piping, which loop of piping includes supply line 7, return line 8 and water-to-air heat exchangers 6 (commonly called “coils”). By regulating the amount of water which passes through each water-to-air heat exchanger 6, or the amount of air blown over said water-to-air heat exchanger 6, the air temperature of each zone may be established as desired (typically in the range of 65 to 75 Degrees Fahrenheit for zones which are inhabited by humans). Following passage of water through a water-to-air heat exchanger 6, heat is drawn from or absorbed by said water

and returns through return line 8 back to boiler 2 or chiller 3 for additional heating or cooling. When in the heating mode, water from the boiler 2 is typically about 180 Degrees Fahrenheit. When in the cooling mode, water from the chiller 3 is typically about 40 Degrees Fahrenheit.

5           Those skilled in the art of present two-pipe hydronic air-conditioning systems will recognize that there are certain limitations of such systems. Namely when hot water is circulating about a two-pipe hydronic system, while the amount of air heating in a particular zone may be increased or decreased, the hot water (typically about 180 Degrees Fahrenheit) may not be used to actually cool air of the zone (typically in a range  
10 of about 65 to 75 Degrees Fahrenheit). Likewise when a two-pipe hydronic air conditioning system is in the cooling mode (namely cold water, about 40 Degrees Fahrenheit), the cold water cannot elevate the temperature of air of a zone, which is typically in the range of about 65 to 75 Degrees Fahrenheit. Rather, when a two-pipe hydronic air-conditioning system is in the heating mode, and the weather changes make  
15 air in the building too warm, the whole system must be switched from heating to cooling mode. The reverse occurs when the two-pipe hydronic system is in the cooling mode and the weather turns cold. While upon first consideration switching an air-conditioning system from heating to cooling mode, or the reverse, might not seem to pose any substantial problems, such problems do exist. Because of "thermal inertia" inherent in  
20 several hundred to several thousands of gallons of water circulating in the two-pipe hydronic air-conditioning system, there are in fact two problems associated with switching between heating and cooling modes (or the reverse). Namely changing the temperature of water in the system by approximately 140 Degrees Fahrenheit consumes both energy excessive resources and time. Both of these problems are particularly acute during  
25 seasonal weather changes which result in large changes in air temperature over a short



course of time, possibly requiring change from heating to cooling and/or the reverse several times a week, or even over the course of a single day. Depending on such weather changes it is quite possible for heating to be needed at night and cooling during the day. In such conditions switching from heating to cooling can take several hours, resulting in substantial waste of energy and several hours of discomfort during each switch-over. While over-sizing the boiler and chiller might reduce the time for switch-over, that solution does not solve the waste of energy which occurs during switch-over and has a plurality of other significant disadvantages, including but not limited to increased capital investment for larger equipment and space to contain and operate it, inefficiencies which frequently result in use of over-sized equipment for short duty cycles, possible imposition of a higher utility rate structure and other disadvantages associated with over-sized equipment.

A better solution to both of these problems is presented by the invention herein disclosed and claimed. Provided herein is a thermal reservoir where cold or alternatively hot water may be stored in fluid isolation from water circulating within the piping (supply line 7 and return line 8) and water-to-air heat exchangers 6 of the system and exchanged with water circulating in the system when the system is switched between heating and cooling modes. For instance, when hot water is circulating about the two-pipe hydronic air-conditioning system (the system is in "heating" mode), chilled water, earlier drawn from the system, is held in reserve. Therefore, when switching the system to the "cooling" mode, same may be rapidly accomplished, without significant loss of energy, by directing chilled water from storage and into the system and directing hot water in the system into storage. Following such exchange hot water is maintained in reserve for return to the system when the system is switched back to the "heating" mode.

A schematic representation of the most preferred embodiment of the invention is

shown in FIG. 2. In said embodiment a single storage tank 10 is provided. Said tank 10 will be constructed of materials capable of alternative storing hot (but less than boiling) water and cold (but above freezing water), at appropriate pressure (usually in the range of 10 to 150 pounds per square inch). In preference tank 10 will be well insulated so as to conserve the temperature of water therein over a long period of time. Tank 10 may be equipped with various means, known to those skilled in the art, for supplemental heating or cooling of water stored therein, so as to maintain hot or cold water stored therein at a desired hot or cold temperature indefinitely. Preferred is a reversible heat pump which may alternatively heat or cool the water in tank 10.

In the preferred embodiment of the invention tank 10 will be sized to have a water storage capacity which closely approximates the volume of the water which circulates in supply line 7, return line 8 and water-to-air heat exchangers 6 when the two-pipe hydronic air-conditioning system is in operation. Depending on the size of the two-pipe hydronic system, this will usually be in a range from several hundred, to several thousands of gallons of water.

In the preferred embodiment of the invention (FIGS. 2, 3 and 4) tank 10 will be cylindrical in shape, have a longitudinal axis terminating at two ends (for descriptive purposes respectively called hot end 12 and cold end 13 herein) and be equipped with piston 11 movably disposed along said longitudinal axis of tank 10. While in the figures herein piston 11 is shown as a flat disc, those skilled in the art will recognize that a piston may take many shapes, including but not limited to convex, concave or complex ends, or even be spherical in shape, all of which are comprehended by the invention disclosed and claimed herein. In addition each end (namely hot end 12 and cold end 13) of tank 10 will be equipped with a port capable of receiving and discharging water through piping attached thereto. Movably disposed piston 11 thereby divides tank 10 into two variably

sized sections. While either section of tank 10 might be connected to receive either hot or cold water, in practice once connected a particular end receives either hot or cold water, thus for purpose of discussing the invention herein disclosed are called "hot end" 12 or "cold end" 13 as mentioned above. As described herein hot end 12 is used to receive therein and discharge hot water therefrom and cold end 13 is used to receive therein and discharge cold water therefrom.

FIG. 2 represents disposition of tank 10 at a preferred location in the two-pipe hydronic air-conditioning system which it serves, namely in parallel connection with boiler 2 and chiller 3 of said two-pipe hydronic air-conditioning system. Referring further to FIG. 2, hot end supply valve 121, hot end return valve 122, cold end supply valve 131 and cold end return valve 132 are used to control admittance and discharge of water to and from hot end 12 and cold end 13 of tank 10. In "normal" positions (that is when the system is running, in either heating or cooling mode, not undergoing transition between said modes) all four of said valves will be closed and pump 4 will cause water to be circulated through either boiler 2 or chiller 3 through supply line 7, water-to-air heat exchangers 6 and return line 8. If the two-pipe hydronic air-conditioning system is in the heating mode then piston 11 will be near the hot end 12 of tank 10, cold end 13 will be enlarged and tank 10 will substantially contain cold water, as is shown in FIG. 3. If, on the other hand, the two-pipe hydronic air-conditioning system is in the cooling mode then piston 11 will be near the cold end 13 of tank 10, hot end 13 will be enlarged and tank 10 will substantially contain hot water, as is shown in FIG. 4.

FIG. 3 shows the position of piston 11 of tank 10 when a two-pipe hydronic air-conditioning system is in the heating mode. In such mode boiler 2 is in service and hot water, about 180 Degrees Fahrenheit is being circulated from boiler 2, through supply line 7, through water-to-air heat exchangers 6, through return line 8 and back through boiler

2. In such mode piston 11 of tank 10 is shifted toward the hot end 12 of tank 10, cold end 13 of tank 10 is expanded by virtue of piston 11 being shifted as said and contains cold water of about 40 Degrees Fahrenheit. To switch the two-pipe hydronic air-conditioning system from heating to cooling modes cold water is to be drawn from cold end 13 of tank 10 and is used to displace hot water circulating in the two-pipe hydronic air-conditioning system (namely supply line 7, water-to-air heat exchangers thereof and return line 8) into the other, or hot water end 12, of tank 10. To do so boiler 2 will typically be taken out of service and cold end supply valve 131 and hot end return valve 122 opened. Opening valve 131 allows cold water, in cold end 13 of tank 10 to be drawn into pump 4 (see FIG. 1) and into supply line 7. Opening valve 122 allows hot water, within the piping (supply line 7 and return line 8) and water-to-air heat exchangers 6 to flow into hot end 12 of tank 10. Accordingly cold water from cold end 12 of tank 10 displaces hot water within the piping (supply line 7 and return line 8) and water-to-air heat exchangers 6 into hot end 13 of tank 10. As cold water is withdrawn from cold end 13 of tank 10 and hot water is introduced into hot end 13 of tank 10, piston 11 of tank 10 will shift towards cold end 13 of tank 10, therefore at the end of the process be in the position shown in FIG. 4. The end of said shifting process may be determined by a plurality of ways, including switches, timers, stoppage of water flow (which may be detected by increase in system pressure) when piston 11 of tank 10 has shifted fully and flow of hot water into hot end 13 stops, or by temperature change of return line 8 near tank 10 (that is, when all the hot water has passed and said line changes from hot to cold). When substantially all of the hot water is displaced from the system and to hot end 12 of tank 10, cold water supply valve 131 and hot water return valve 122 is closed, and chiller 3 placed into service. At this time cold water will already be in the piping (supply line 7 and return line 8) and water-to-air heat exchangers 6 of the system. It will not be necessary for the chiller to consume

substantial quantities of energy to bring the temperature of the water in the system to efficient cooling temperature (typically about 40 Degrees Fahrenheit). Immediate cooling of the air of the building may commence. In addition thereto, hot water removed from the system has been stored for subsequent use when the system is later switched back to heating mode, thereby conserving the energy which was used to heat said water. Thereby switching the two-pipe hydronic air-conditioning system from heating to cooling may be accomplished in a facile, speedy manner, with substantially no waste of energy (the only energy used in switching over, as aforesaid, is the amount on energy consumed by pump 4 to pump stored cold water into the system and displace hot water from the system into storage).

Referring now to FIG. 4 it is seen that the process described above is a fully reversible one, that is, the invention may also be used to switch a two-pipe hydronic air-conditioning system from cooling mode to heating mode, with speed and energy efficiency. FIG. 4 represents the position of piston 11 of the preferred embodiment of the invention when the two-pipe hydronic air-conditioning system which it serves is in the cooling mode. In such mode, chiller 3 is in service and pump 4 is therefore circulating cold water through supply line 7, water-to-air heat exchangers 6 and return line 8 of the two-pipe hydronic air-conditioning system. Hot water (previously withdrawn from the system, as above) is stored in tank 10 (at hot end 12 of tank 10). Hot end supply valve 121, hot end return valve 122, cold end supply valve 131 and cold end return valve 132 will all typically be closed. In order to switch the two-pipe hydronic air-conditioning system from cooling to heating mode, chiller 3 will be taken out of service and hot end supply valve 121 and cold end return 132 valve opened. This will cause pump 4 to draw hot water from the hot end 13 of tank 10 into supply line 7, water-to-air heat exchangers 6 and return line 8, thereby displacing water cold water therefrom, through cold end return valve 132 and in

to cold end 13 of tank 10. Removing hot water from hot end 12 of tank 10 and injecting cold water into cold end 13 of tank 10 causes piston 11 to shift toward the hot end 12 of tank 10. That action increases the size of cold end 13 of tank 10, enabling it to receive all of the cold water removed from the system. Upon removal of all the cold water from the system hot end supply valve 121 and cold end return valve 132 are closed, and boiler 2 placed in service. At this time hot water is already in the piping and water-to-air heat exchangers of the two-pipe hydronic air-conditioning system, the air of the building serviced thereby may be immediately warmed, the boiler need not be run for a substantial length of time (consuming substantial quantity of energy in the process) to heat water of the system to proper operating temperature (typically about 180 Degrees Fahrenheit); and, cold water previously in the system has been placed in cold storage (thereby the energy used to chill the water has been conserved).

It is therefore seen that the invention herein disclosed may be employed both to switch a two-pipe hydronic air-conditioning system from heating to cooling, or from cooling to heating, in a simple and facile manner, rapidly, and without waste of energy.

Those skilled in the art will recognize various permutations, alternatives and/or modifications may be made in respect to the preferred embodiment of the invention, including but not necessarily limited to where in the two-pipe hydronic air-conditioning system it may be placed, the use of other containers such as a bladder instead of a tank of rigid structure to form a water reservoir, the number of a plurality of tanks, bladders or other containers used to constitute a thermal reservoir, the use of an elastic bladder rather than piston to divide tanks, bladders or other containers into separate compartments for storage of hot and cold water without mixing thereof, and the use of separate containers for storage of hot and cold water. Such alternatives, permutation and/or modifications being obvious to those skilled in the art from the disclosure herein

made, said alternatives, permutations and/or modifications are comprehended by the invention herein disclosed and claimed.

For instance, those skilled in the art will recognize that instead of the thermal reservoir of the invention being disposed in parallel connection with boiler 2 and chiller 3, same might be disposed "in line," in either supply line 7 or return line 8. FIG. 5 illustrates placement of the thermal reservoir valves within supply line 7 of the two-pipe hydronic air-conditioning system. The same arrangement would apply if said thermal reservoir and associated valves were installed in return line 8. In such arrangement hot water supply valve 121, hot water return valve 122, cold water supply valve 131 and cold water return valve 132, boiler 2 and chiller 3 would all be operated as described above. The one difference between placement of the thermal reservoir of the invention in parallel arrangement with boiler 2 and chiller 3 (as is illustrated in FIGS. 2, 3 and 4) and connection in series with supply line 7 (or return line 8) relates to by-pass valve 123, which allows circulation of hot or cold water about the loop (including supply line 7, water-to-air heat exchangers 6, and return line 8) of the two-pipe hydronic air-conditioning system when all four of the other valves shown in FIG. 5 (namely hot water supply valve 121, hot water return valve 122, cold water supply valve 131 and cold water return valve 132) are all closed (thereby fluidly isolating water in tank 10 from the remainder of the system). Accordingly these embodiments of the invention are intended to be comprehended and claimed.

FIG. 6 illustrates a modification of the invention seen in FIG. 5 above. In FIG. 6 multiple tanks connected in parallel arrangement to each other may be used in lieu of single tank 10, illustrated in FIGS. 2, 3, 4 and 5. In FIG. 6 the thermal reservoir of the invention is installed "in line" of supply line 7. It will be obvious to those skilled in the art that it could as equally well be installed within return line 8, and that a similar arrangement

of a plurality of tanks of small r capacity may be used as a substitute for a single tank of larger capacity, whether the invention herein disclosed is installed in parallel with boiler 2 and chiller 3, or in series connection, within supply line 7 or return line 8 as discussed herein. Accordingly these embodiments of the invention are intended to be  
5 comprehended and claimed.

As mentioned above, there are other embodiments of the invention possible. Only some of them can be illustrated herein. FIG. 7 illustrates the invention using two separate tanks, one of which 22 is dedicated to store hot water, and the other of which 23 is dedicated to the storage of cold water. In this embodiment, tanks 22 and 23 would have  
10 a vent for the admission of air to the upper portion of the tank in order for water to be drawn therefrom. In operation of this embodiment of the invention by-pass valve 243 is normally open (that is when the two-pipe hydronic air-conditioning system is in either heating or cooling modes, not being switched from one mode to the other). When it is necessary to switch modes valve 243 is closed and valves either hot water supply valve  
15 121 and cold water return valve 131 or cold water supply valve 132 and hot water return valve 122 are opened to withdraw water from the appropriate tank and direct water withdrawn from the system into the opposite tank.

FIG. 8 shows yet another permutation of the present invention. In said permutation two separate tanks, 32 and 33 are used, one for the storage of hot water, the other for the  
20 storage of cold water. In this permutation, tanks 32 and 33 are equipped with elastic bladders 111, having gas pressure outside thereof. Accordingly a filled tank is charged (through valve 321 or 331) with water under the pressure of the discharge pressure of pump 4 (see FIG. 1). By closing by-pass valve 343 said pressure is released (through either valve 322 or 332) to a lower pressure (downstream of valve 343, which is effectively  
25 the suction pressure of pump 4).



Those skilled in the art will recognize that the invention disclosed herein may be subject to many other modifications which do not depart substantially therefrom, thus are comprehended thereby. For instance, those skilled in the art will recognize that in lieu of a piston, tank 10 might employ one or more bladders to separate tank 10 into two variable  
5 volume sections.

The invention is simple and easy to use. While operation of the various valves and/or pumps may be accomplished by manual means, in preference they will automatically be operated by or in conjunction with means that are used to perform various other functions associated with switching a two-pipe hydronic system between  
10 modes (such as switching the boiler or chiller in and out of service). Those skilled in the art will recognize many electric, hydraulic and/or pneumatic controls whereby such automatic operation can be accomplished, and are comprehended by the invention disclosed herein.

While the above description contains many specificities, these should not be  
15 construed as limitations on the scope of the invention, but rather as an exemplification of one preferred embodiment thereof. Accordingly, the scope of the present invention should be determined not by the embodiment(s) illustrated, but by the appended claims and their legal equivalents.

## **CLAIMS**

What is claimed is

1. A thermal reservoir for a two-pipe hydronic air-conditioning system which said two-pipe hydronic air-conditioning system contains a means to heat water, means to chill  
5 water, a volume of hot or cold water, a pump to circulate said hot or cold water about a piping loop containing a supply line and a return line and a plurality of water-to-air heat exchangers connected to said supply line and to said return line of said loop, comprising:

a. tank means for storing a volume of hot water in a first portion thereof and cold water in a second portion thereof;

10 b. first valve means connecting said first portion of said tank to said supply line of said two-pipe hydronic air-conditioning system, second valve means connecting said first portion of said tank to said return line of said two-pipe hydronic air-conditioning system, third valve means connecting said second portion of said tank to said first portion of said tank to said supply line of said two-pipe hydroponic air-conditioning system, and  
15 fourth valve means connecting said second portion of said tank to said first portion of said tank to said return line of said two-pipe hydroponic air-conditioning system.

2. The thermal reservoir of Claim 1 wherein said tank means is comprised of a cylindrically shaped tank having a first end, a second end, a longitude disposed therebetween, and a piston movably disposed along said longitude of said tank.

20 3. The thermal reservoir of Claim 2 wherein said thermal reservoir is comprised of a plurality of tanks fluidly connected in parallel, each of which said tanks is cylindrically shaped, has a first end, a second end, a longitude disposed therebetween and a piston movably disposed along said longitude thereof.

4. The thermal reservoir of Claim 1 wherein said tank means is divided into said first  
25 and second portions thereof by an elastic membrane.

5. The thermal reservoir of Claim 1 wherein said tank means is comprised of a first tank which is dedicated to receiving and discharge of hot water and a second tank which is dedicated to receiving and discharge of cold water.

6. The thermal reservoir of Claim 1 wherein said thermal reservoir is fluidly connected in parallel with said means to heat and means to chill water of said two-pipe hydronic air-conditioning system.

7. The thermal reservoir of Claim 2 wherein said thermal reservoir is fluidly connected in parallel with said means to heat and means to chill water of said two-pipe hydronic air-conditioning system.

8. The thermal reservoir of Claim 3 wherein said thermal reservoir is fluidly connected in parallel with said means to heat and means to chill water of said two-pipe hydronic air-conditioning system.

9. The thermal reservoir of Claim 4 wherein said thermal reservoir is fluidly connected in parallel with said means to heat and means to chill water of said two-pipe hydronic air-conditioning system.

10. The thermal reservoir of Claim 5 wherein said thermal reservoir is fluidly connected in parallel with said means to heat and means to chill water of said two-pipe hydronic air-conditioning system.

11. The thermal reservoir of Claim 1 wherein said thermal reservoir is fluidly connected in series with a portion of said supply line of said two-pipe hydronic air-conditioning system.

12. The thermal reservoir of Claim 2 wherein said thermal reservoir is fluidly connected in series with a portion of said supply line of said two-pipe hydronic air-conditioning system.

13. The thermal reservoir of Claim 3 wherein said thermal reservoir is fluidly connected

in series with a portion of said supply line of said two-pipe hydronic air-conditioning system.

14. The thermal reservoir of Claim 4 wherein said thermal reservoir is fluidly connected in series with a portion of said supply line of said two-pipe hydronic air-conditioning system.

5

15. The thermal reservoir of Claim 5 wherein said thermal reservoir is fluidly connected in series with a portion of said supply line of said two-pipe hydronic air-conditioning system.

## **ABSTRACT**

A thermal reservoir for a two-pipe hydronic air-conditioning system is disclosed. Said thermal reservoir includes a well-insulated tank for alternatively storing hot and cold water. Said thermal reservoir contains plurality of valves for directing hot water stored therein into the two-pipe hydronic air-conditioning system, thereby causing cold water within the two-pipe hydronic air-conditioning system to be displaced therefrom and into well insulated storage tank. Said process is fully reversible in that cold water displaced from the two-pipe hydronic air-condition system into said thermal reservoir may be subsequently directed from the thermal reservoir and restored to the two-pipe hydronic air-conditioning system and hot water therefrom directed back into storage. Accordingly a two-pipe hydronic air-conditioning system may be switched between heating and cooling modes with rapidity and without waste of the energy content of said hot water and said cold water.

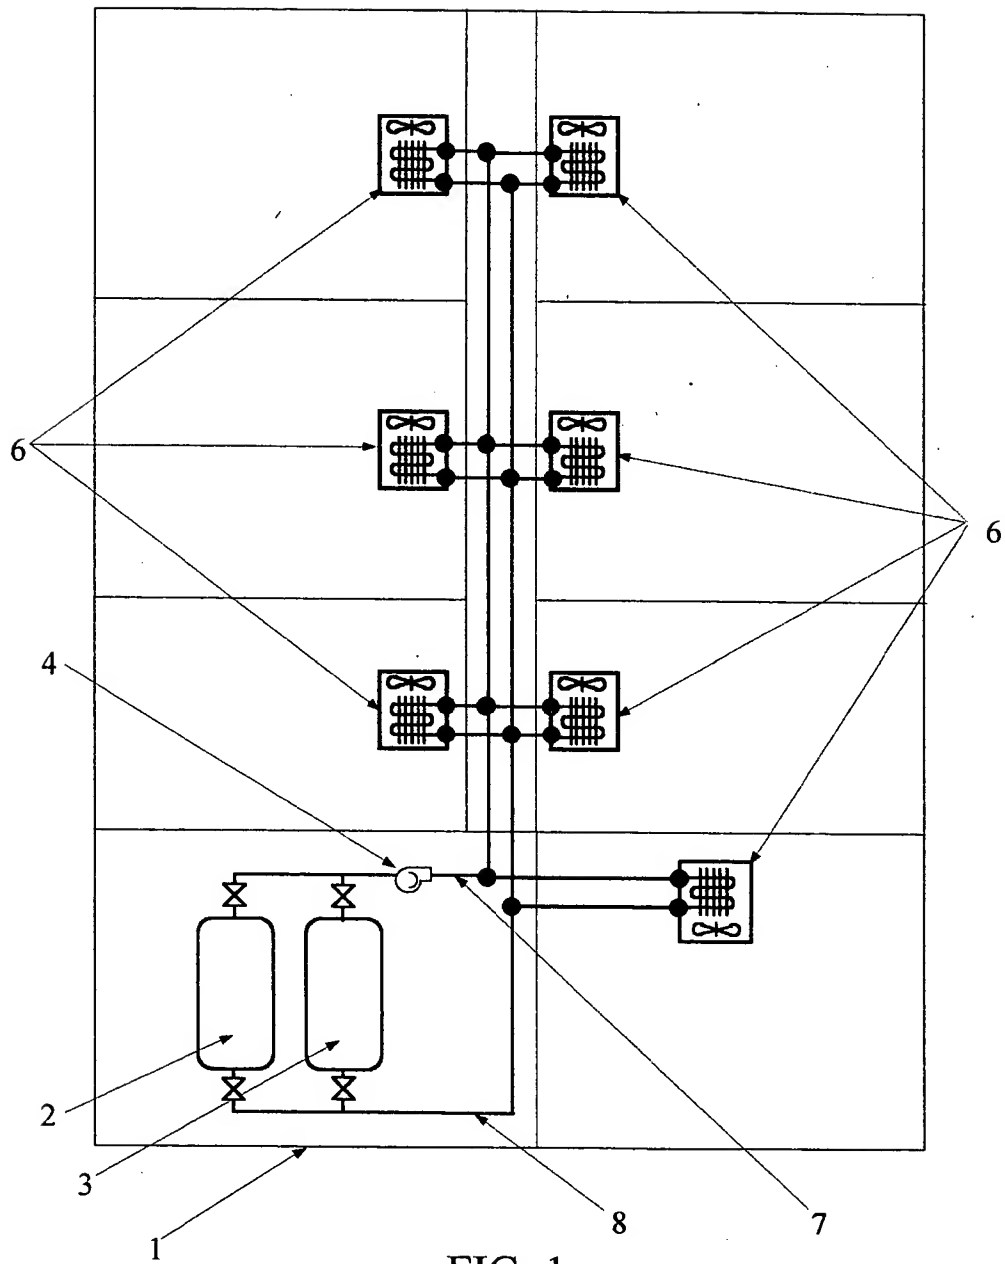


FIG. 1  
(Prior Art)

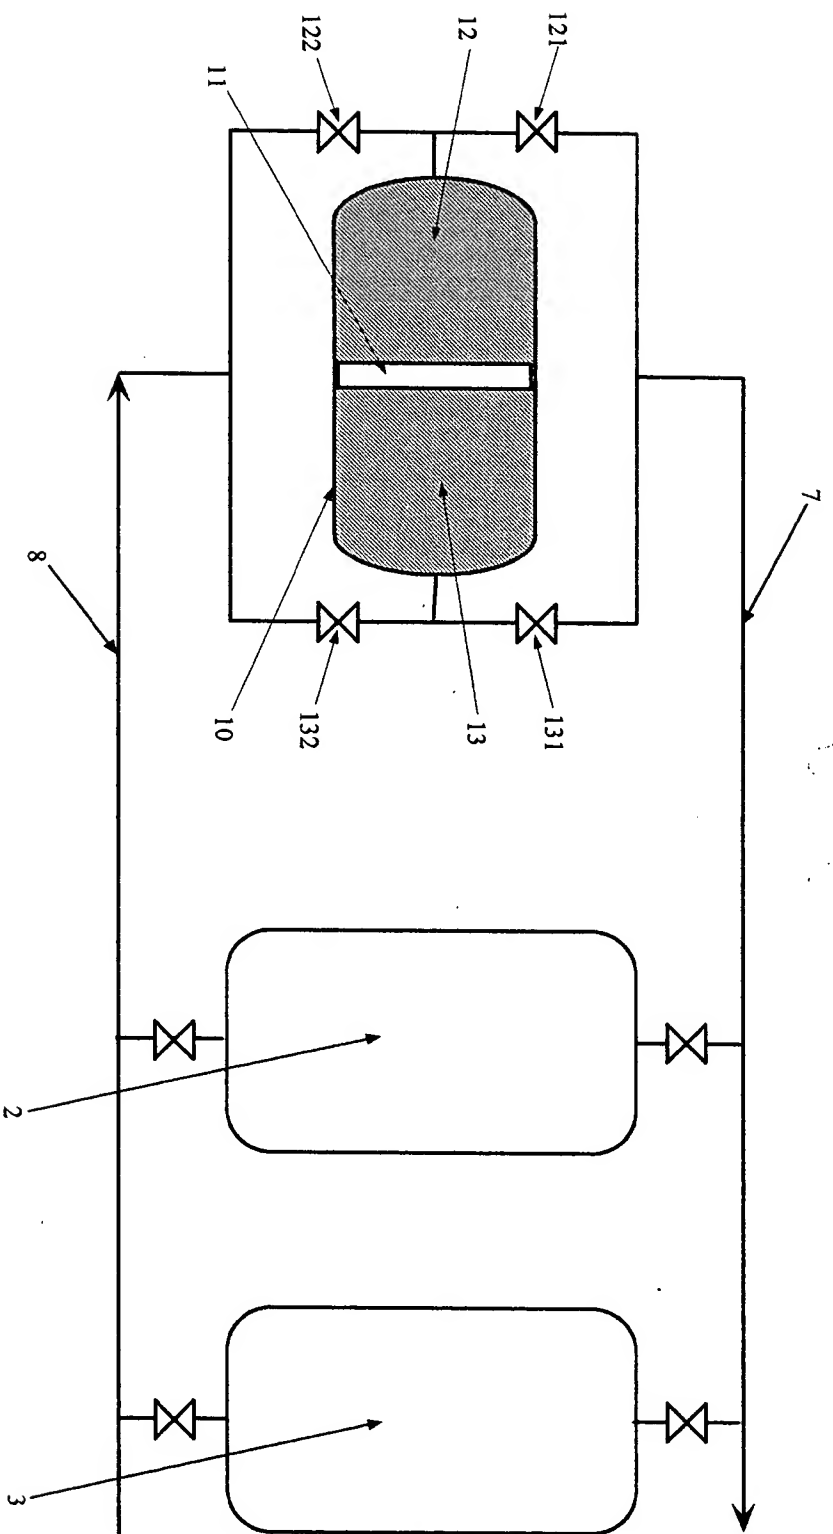


FIG. 2

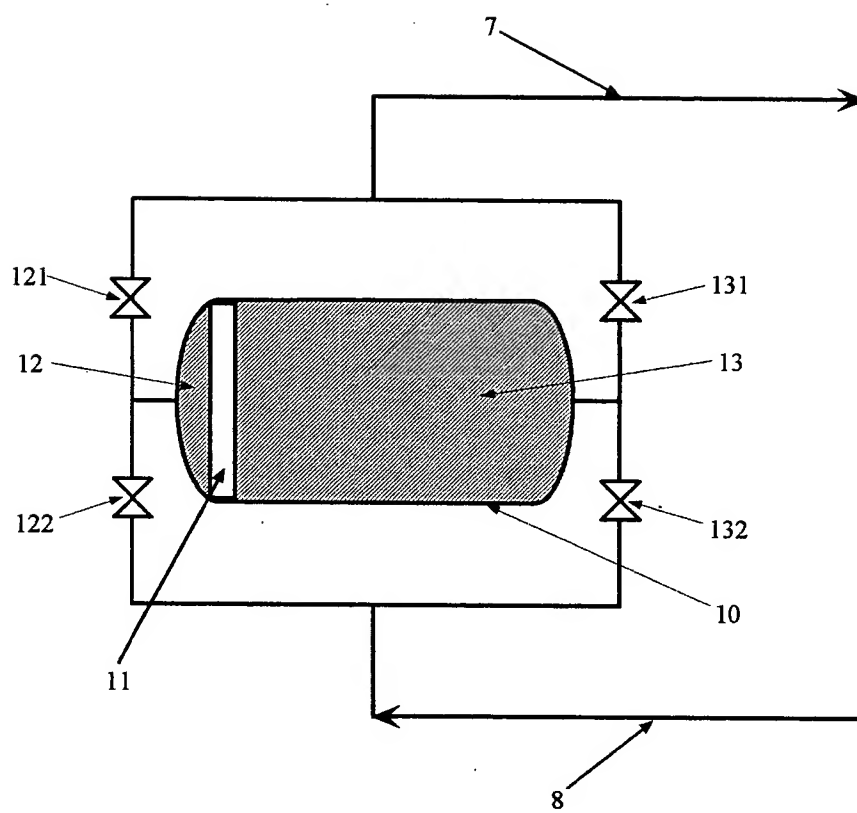


FIG. 3



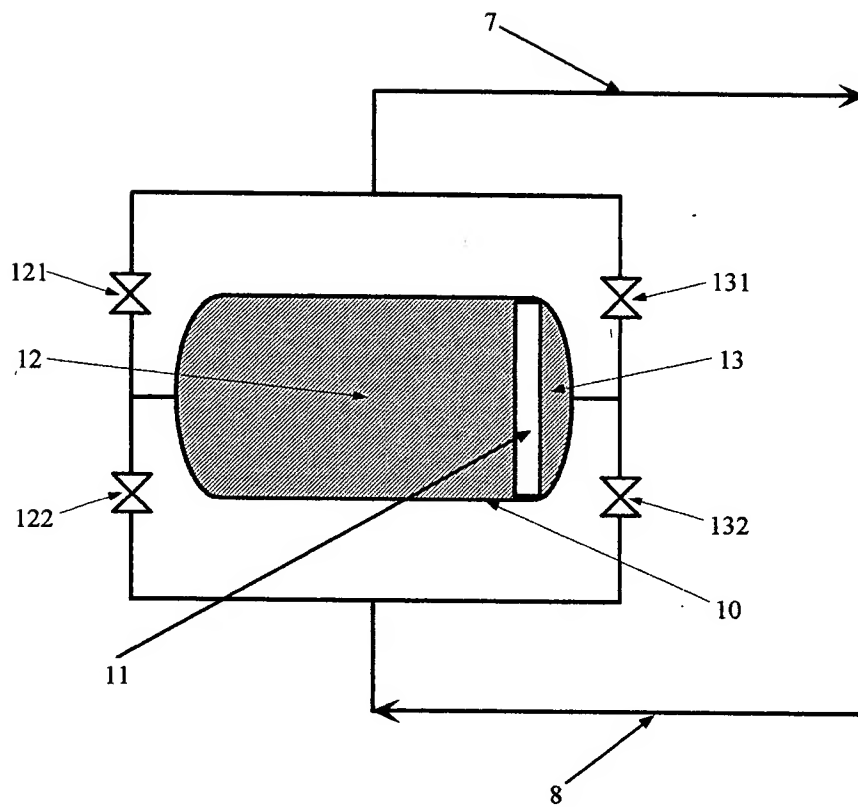


FIG. 4

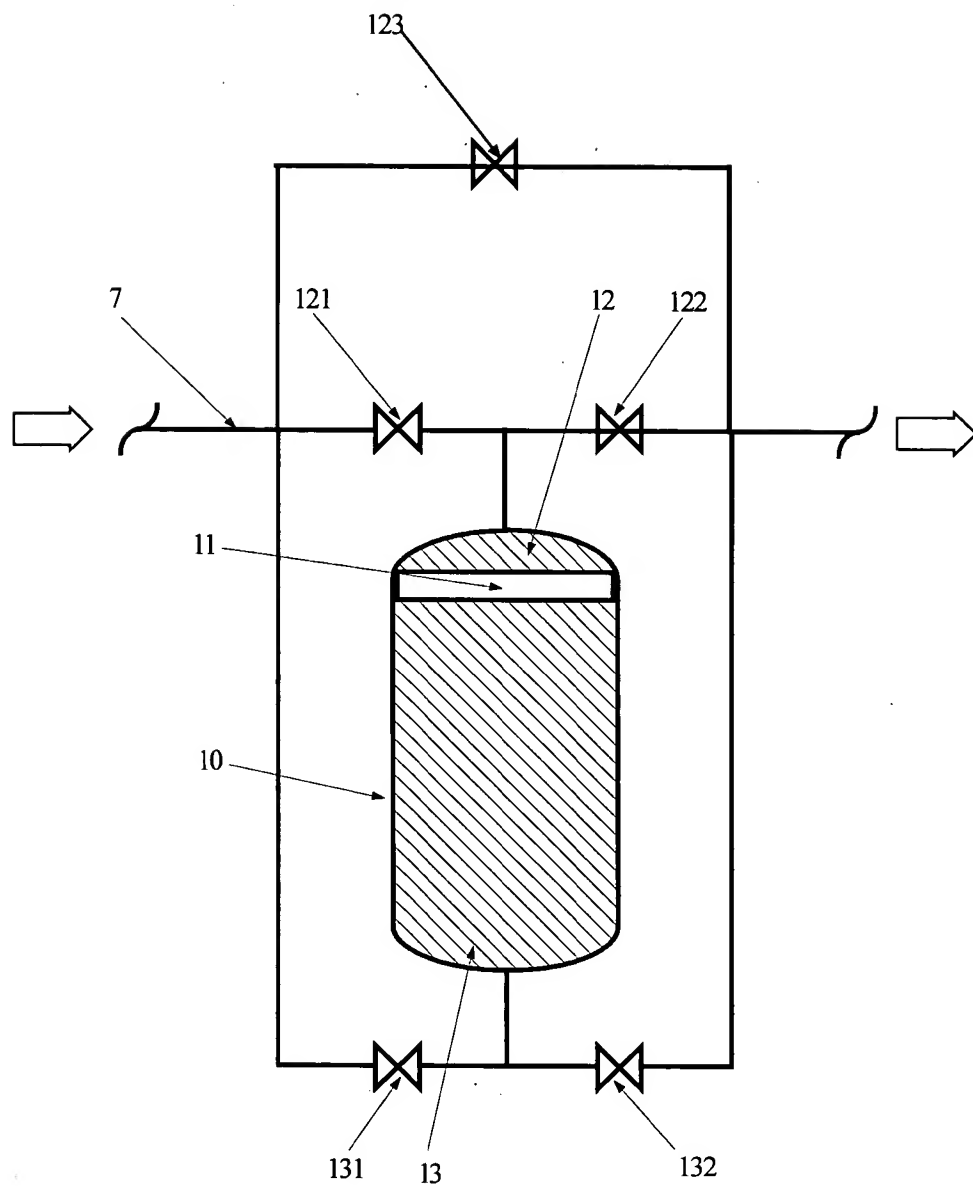


FIG. 5

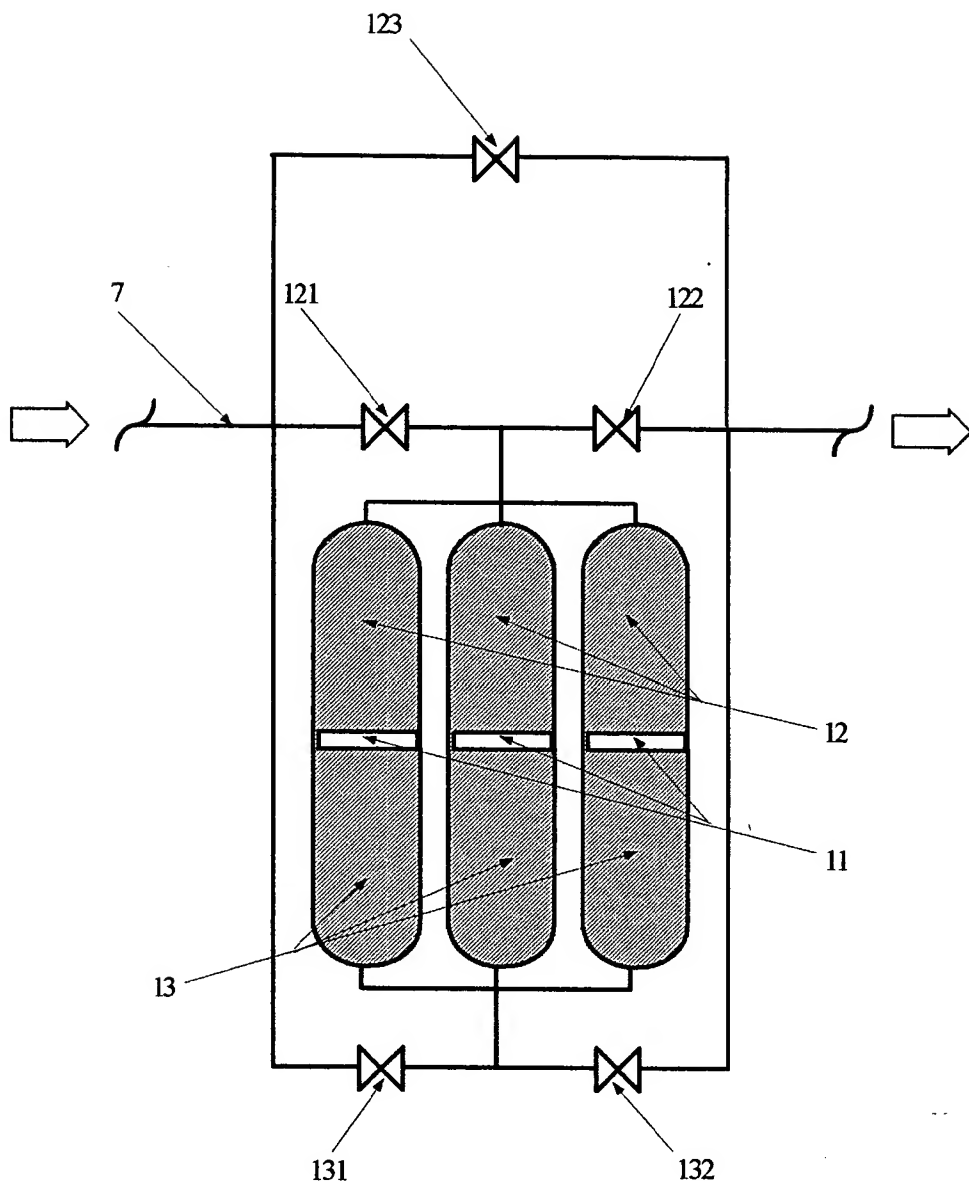


FIG. 6

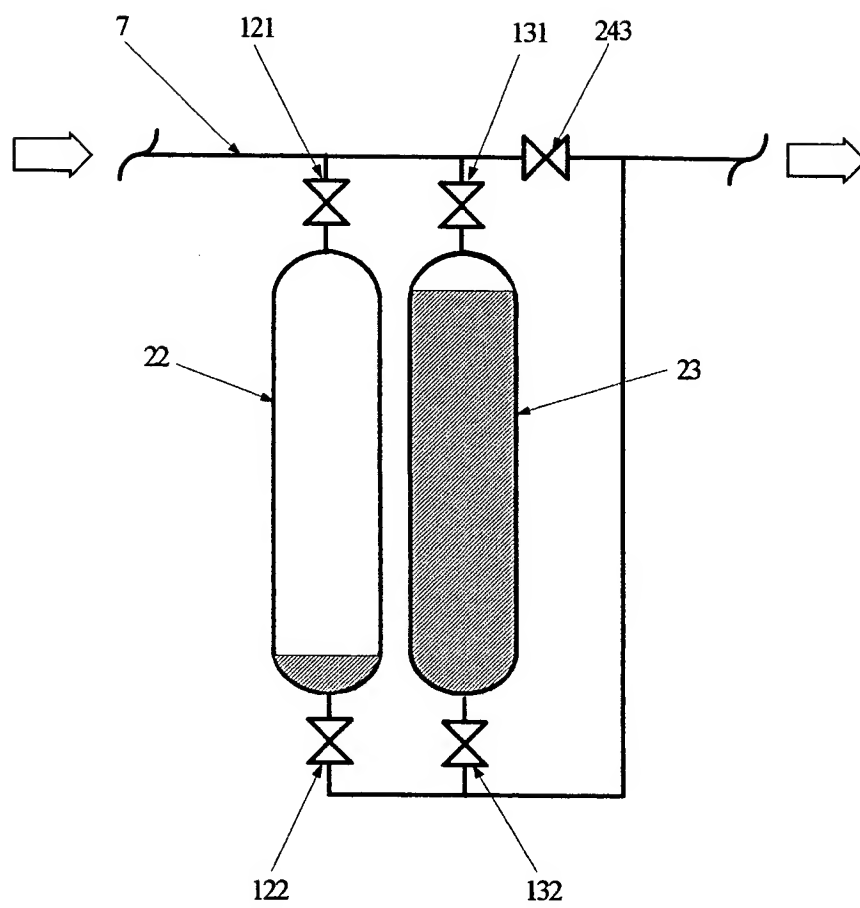


FIG. 7

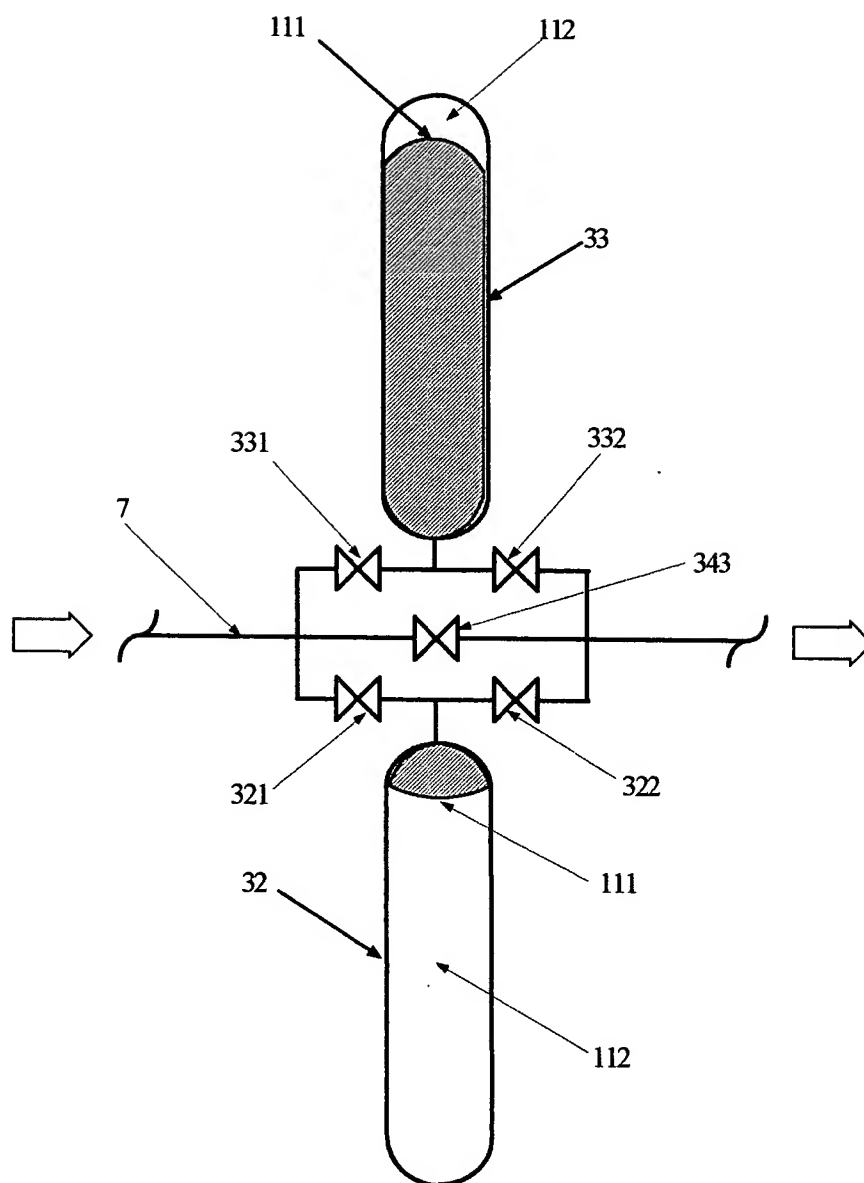


FIG. 8

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

<b>DECLARATION FOR UTILITY OR DESIGN PATENT APPLICATION</b> <b>(37 CFR 1.63)</b>		Attorney Docket Number	10303-62177
		First Named Inventor	Comeaux, Vernal J.
		COMPLETE IF KNOWN	
		Application Number	TBA
		Filing Date	January 29, 2004
<input checked="" type="checkbox"/> Declaration Submitted With Initial Filing      OR <input type="checkbox"/> Declaration Submitted after Initial Filing (surcharge (37 CFR 1.16 (e)) required)		Art Unit	TBA
		Examiner Name	TBA

**I hereby declare that:**

Each inventor's residence, mailing address, and citizenship are as stated below next to their name.

I believe the inventor(s) named below to be the original and first inventor(s) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

Thermal Reservoir for Two-Pipe Hydronic Air-Conditioning System

(Title of the Invention)

the specification of which

☒ is attached hereto

OR

☐ was filed on (MM/DD/YYYY) [ ] as United States Application Number or PCT International

Application Number [ ] and was amended on (MM/DD/YYYY) [ ] (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment specifically referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56, including for continuation-in-part applications, material information which became available between the filing date of the prior application and the national or PCT international filing date of the continuation-in-part application.

I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) or (f), or 365(b) of any foreign application(s) for patent, inventor's or plant breeder's rights certificate(s), or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent, inventor's or plant breeder's rights certificate(s), or any PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application Number(s)	Country	Foreign Filing Date (MM/DD/YYYY)	Priority Not Claimed	Certified Copy Attached?	
				Yes	No
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>



☐ Additional foreign application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

[Page 1 of 2]

This collection of information is required by 35 U.S.C. 115 and 37 CFR 1.63. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 21 minutes to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.

## DECLARATION — Utility or D sign Patent Application

Direct all correspondence to: <input checked="" type="checkbox"/> Customer Number: <span style="border: 1px solid black; padding: 2px 20px;">29148</span> <b>OR</b> <input type="checkbox"/> Correspondence address below			
Name			
Address			
City		State	ZIP
Country	Telephone	Fax	
I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.			
NAME OF SOLE OR FIRST INVENTOR:		<input type="checkbox"/> A petition has been filed for this unsigned inventor	
Given Name (first and middle [if any])		Family Name or Surname	
Vernal J.		Comeaux	
Inventor's Signature			Date
			01/24/04
Residence: City	State	Country	Citizenship
Scott	LA	US	US
Mailing Address			
358 Andres Road			
City	State	ZIP	Country
Scott	LA	70583	US
NAME OF SECOND INVENTOR:		<input type="checkbox"/> A petition has been filed for this unsigned inventor	
Given Name (first and middle [if any])		Family Name or Surname	
Chris D.		Morgan	
Inventor's Signature			Date
			1/29/04
Residence: City	State	Country	Citizenship
Church Point	LA	US	US
Mailing Address			
275 Saul Drive			
City	State	ZIP	Country
Church Point	LA	70525	US
<input type="checkbox"/> Additional inventors or a legal representative are being named on the _____ supplemental sheet(s) PTO/SB/02A or 02LR attached hereto.			

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

**POWER OF ATTORNEY  
and  
CORRESPONDENCE ADDRESS  
INDICATION FORM**

Application Number	TBA
Filing Date	January 29, 2004
First Named Inventor	Comeaux, Vernal J.
Title	Thermal Reservoir for Two-Pipe Hydronic Air-Conditioning System
Art Unit	TBA
Examiner Name	TBA
Attorney Docket Number	10303-62177

I hereby appoint:

☒ Practitioners associated with the Customer Number:

29148

OR

☐ Practitioner(s) named below:

Name	Registration Number

as my/our attorney(s) or agent(s) to prosecute the application identified above, and to transact all business in the United States Patent and Trademark Office connected therewith.

Please recognize or change the correspondence address for the above-identified application to:

☐ The address associated with the above-mentioned Customer Number:

OR

☐ The address associated with Customer Number:

OR


<input type="checkbox"/> Firm or Individual Name				
Address				
Address				
City		State		Zip
Country				
Telephone		Fax		

I am the:

☒ Applicant/Inventor.

☐ Assignee of record of the entire interest. See 37 CFR 3.71.  
Statement under 37 CFR 3.73(b) is enclosed. (Form PTO/SB/96)

## SIGNATURE of Applicant or Assignee of Record

Name	Vernal J. Comeaux		
Signature			
Date	01/29/04	Telephone	337-236-6931

NOTE: Signatures of all the inventors or assignees of record of the entire interest or their representative(s) are required. Submit multiple forms if more than one signature is required, see below\*.

☒ \*Total of 2 forms are submitted.

This collection of information is required by 37 CFR 1.31 and 1.33. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 3 minutes to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.



Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

# **POWER OF ATTORNEY and CORRESPONDENCE ADDRESS INDICATION FORM**

Application Number	TBA
Filing Date	January 29, 2004
First Named Inventor	Comeaux, Vernal J.
Title	Thermal Reservoir for Two-Pipe
Art Unit	TBA Hydronic Air-Conditioning
Examiner Name	TBA System
Attorney Docket Number	10303-62177

I hereby appoint:

☒ Practitioners associated with the Customer Number:

29148

OR

☐ Practitioner(s) named below:

Name	Registration Number

as my/our attorney(s) or agent(s) to prosecute the application identified above, and to transact all business in the United States Patent and Trademark Office connected therewith.

Please recognize or change the correspondence address for the above-identified application to:

☐ The address associated with the above-mentioned Customer Number:

OR

☐ The address associated with Customer Number:

OR


<input type="checkbox"/> Firm or Individual Name				
Address				
Address				
City		State		Zip
Country				
Telephone		Fax		

I am the:

☒ Applicant/Inventor.

☐ Assignee of record of the entire interest. See 37 CFR 3.71.  
Statement under 37 CFR 3.73(b) is enclosed. (Form PTO/SB/96)

## SIGNATURE of Applicant or Assignee of Record

Name	Chris D. Morgan		
Signature			
Date	1/29/04	Telephone	337-886-1280

NOTE: Signatures of all the inventors or assignees of record of the entire interest or their representative(s) are required. Submit multiple forms if more than one signature is required, see below\*.

☒ \*Total of 2 forms are submitted.

This collection of information is required by 37 CFR 1.31 and 1.33. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 3 minutes to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.